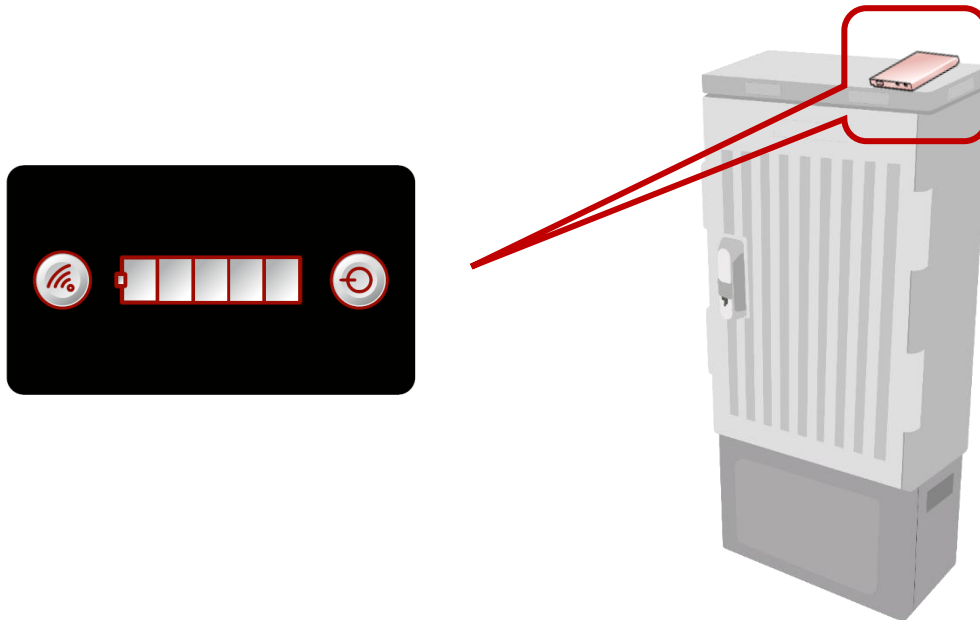


DESCRIPTION

The Power Supply Unit is used to supply power to the Main Access Unit in passive network installations. This component uses inductive power transfer technology.


SPECIFICATIONS

GENERAL INFORMATION	
Product Name	Power Supply Unit

TECHNICAL SPECIFICATIONS	
Power Supply	Integrated 2000mAh Lithium Polymer Battery
Charging Time	2 - 4 hours via Micro-USB
Battery life	Up to 1000 opening procedures (depends on lock)
Indicators	LEDs for <ul style="list-style-type: none"> - Power On/Off (red) - Power Transfer enabled (yellow) - Battery level (green)
Operation temperature	-10°C – 65°C
Dust and water protection	IP67
Weight	250g
Dimensions	150mm x 120mm x 45mm
Product Certification	CE (RED)

ORDERING INFORMATION	
Ordering code	KTS-LOCK-PSU